




High sparkle control electric ray. Suitable for all types of general lighting applications. Integrated lighting solution with LED-On XL Module. Compatible with all AR111 lamp options. Tool-free module or lamp installation. Various frame and body color options to match the design. Easy locking mechanism for body mounting and maintenance. Maintenance-free engineering plastic body. Long-lasting LED product with aluminum outer body. Long-lasting and lightweight design. No special tools required for ceiling mounting.

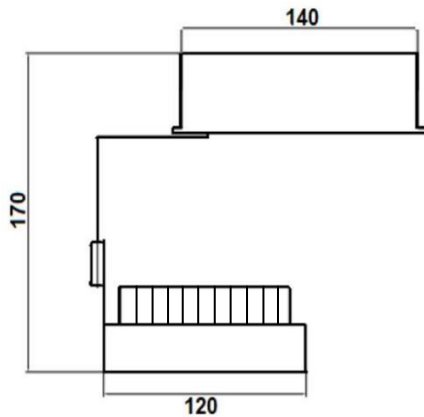

- Outer Diameter -  $\varnothing$ 120mm
- Height - 170mm
- Flame-retardant ABS Body Material
- Three-phase, Single-phase, and DALI Socket Options

Description	Power (W)	Lumen (lm)	CCT (Kelvin)	CRI	Current (mA) /Voltage (V)	Code
Pulse XL COB TR Spot	15 W	1800	2700 K	80+	350 mA	IRX001.015.827.XXX.AA.Y
Pulse XL COB TR Spot	20 W	2300	2700 K	80+	500 mA	IRX001.020.827.XXX.AA.Y
Pulse XL COB TR Spot	15 W	1900	3000 K	80+	350 mA	IRX001.015.830.XXX.AA.Y
Pulse XL COB TR Spot	20 W	2400	3000 K	80+	500 mA	IRX001.020.830.XXX.AA.Y
Pulse XL COB TR Spot	15 W	1970	4000 K	80+	350 mA	IRX001.015.840.XXX.AA.Y
Pulse XL COB TR Spot	20 W	2500	4000 K	80+	500 mA	IRX001.020.840.XXX.AA.Y

Product Series

CRI ve CCT (Kelvin)

Product Power

IRX001.008.827.XX.AA.Y

Driver Control Option

1 = On Off
2 = Faz Dim
3 = 0-10V
4 = DALI

Product Color Option

Angle Options

(15°/24°/38°/VW/FL/AS/etc.)

50 Black + Black	54 Black + Gold	58 White + Gold	62 Gray + White	66 Gri + Krom
51 White + White	55 Black + Rose	59 White + Rose	63 Gray + Black	67 Gray + Platin
52 Black + White	56 Black + Krom	60 White + Krom	64 Gray + Rose	
53 White + Black	57 Black + Platin	61 White + Platin	65 Gray + Gold	