


Very Low Glare Surface Spotlight.
 For use in all general lighting applications.
 Complete solution with LED-On 50 Module.
 Compatible with all MR16 retrofit lamps.
 Click-On Module or Lamp mount design.
 Outer & Body Color options for design requirements.
 Maintenance free service with engineering polymer.
 Long life & Light weight in service.
 Easy Switch-On mechanism for body assembly.
 Aluminium Outer Body parts for long life.
 Direct Ceiling Mount for Surface Mount

- Outer Dimensions – 75mm x 75mm
- Height - 150mm
- Weight – 355gr • ABS non-flammable material
- 15°, 24°, 38° Beam Angle Options



Product Description	Power (W)	Lumen (lm)	CCT (Kelvin)	CRI	Beam Angle Options	Current (mA) /Voltage (V)	Reference Code
Pulse SS Surface Spot	8,0 W	750 Lm	2700 K	80+	15°, 24°, 38°	200 mA	ITA002.008.827.XX.AA.Y
Pulse SS Surface Spot	8,0 W	800 Lm	3000 K	80+	15°, 24°, 38°	200 mA	ITA002.008.830.XX.AA.Y
Pulse SS Surface Spot	8,0 W	850 Lm	4000 K	80+	15°, 24°, 38°	200 mA	ITA002.008.840.XX.AA.Y
Pulse SS Surface Spot	11,0 W	950 Lm	2700 K	80+	15°, 24°, 38°	250 mA	ITA002.011.827.XX.AA.Y
Pulse SS Surface Spot	11,0 W	1000 Lm	3000 K	80+	15°, 24°, 38°	250 mA	ITA002.011.830.XX.AA.Y
Pulse SS Surface Spot	11,0 W	1050 Lm	4000 K	80+	15°, 24°, 38°	250 mA	ITA002.011.840.XX.AA.Y

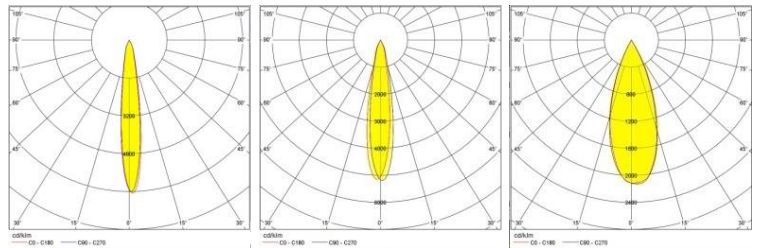